

DATA SHEET ▶ DYNAMIK BLACK M6 FUSION SPLICER



M/FSDBM6

LA FUSIONADORA DYNAMIK BLACK M6 DE ALTO RENDIMIENTO ES APTA PARA TRABAJAR TODAS LAS FIBRAS DESPLEGADAS EN REDES FTTH, REDES LOCALES, ETC. UN EQUIPO DE ALINEACIÓN POR NÚCLEO, 6 MOTORES, PORTABILIDAD, PRECISIÓN Y ROBUSTEZ.

IDENTIFY FIBER	SM(G.652), MM(ITU-T G.651), DS(G.653), NZDS(G.655)
CLADDING DIAMETER	80-150mm
COATING DIAMETER	160-1000mm
TYPICAL LOSS	SM: 0.02dB ; MM:0.01dB ; DS: 0.04dB ; NZDS: 0.04dB
CUTTING LENGTH	5-16mm (coating d 250mm),16mm (coating:250-1000mm)
PROGRAM	PROGRAM 40 GROUPS
OPERATION MODE	AUTOMATIC & MANUAL MODE
AUTO HEAT	16 SECONDS FOR 60MM AND 40MM SLEEVES
SPLICE TIME	6 SECONDS
OBSERVATION MODE	VIEWING DISPLAY DUAL HIGH SENSITIVY CAMERA, 5 INCH LCD
FUSION RECORDS	4000 GROUPS DATA RECORDS SPLICING
ESTIMATE LOSS	SM: 0.02dB ; MM:0.01dB ; DS: 0.04dB ; NZDS: 0.04dB
TENSION	1.8 ~ 2.25N
OPERATION INTERFACE	GUI MENÚ INTERFACE
BATTERY INTERFACE	5200 MAH LI-BATTERY, 240/480 CYCLES
POWER SUPPLY	INPUT: AC100-240V(50-60HZ) OUTPUT
ELECTRODES LIFE	4000 ARC DISCHARGES
INTERFACE	USB 2.0 PORT FOR SOFTWARE UPGRADING & RECORDS EXPORTING
OPERATION ENVIROMENT	ALTITUDE: 0-5000M, HUMIDITY:0.95% TEMP:-10~+50°C 15M/S
VOLUME/WEIGHT	140X150X160MM 2.30KG (BATTERY INCLUDED)
APLICABLE FIBER	SM(G.652), MM(G.651), DS(G.653), NZDS(G.655) & Sm (G.657)
FIBER ZOOM	250X(XOR Y VIEW), 125X(X AND Y VIEW)



PREMIUM

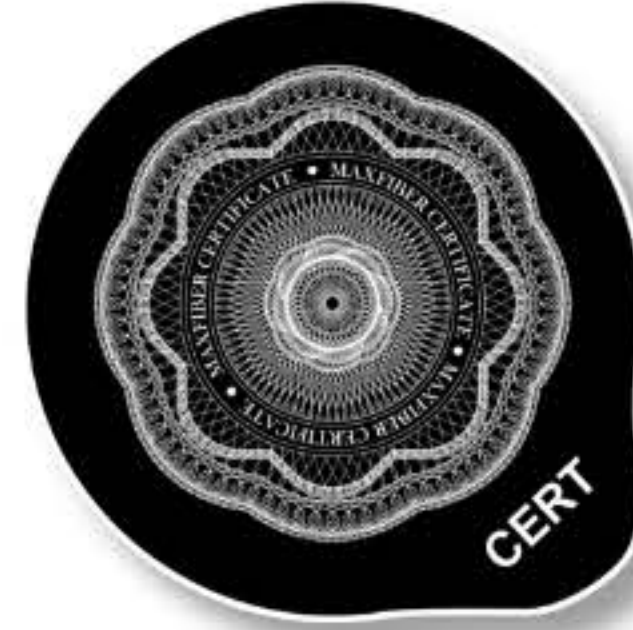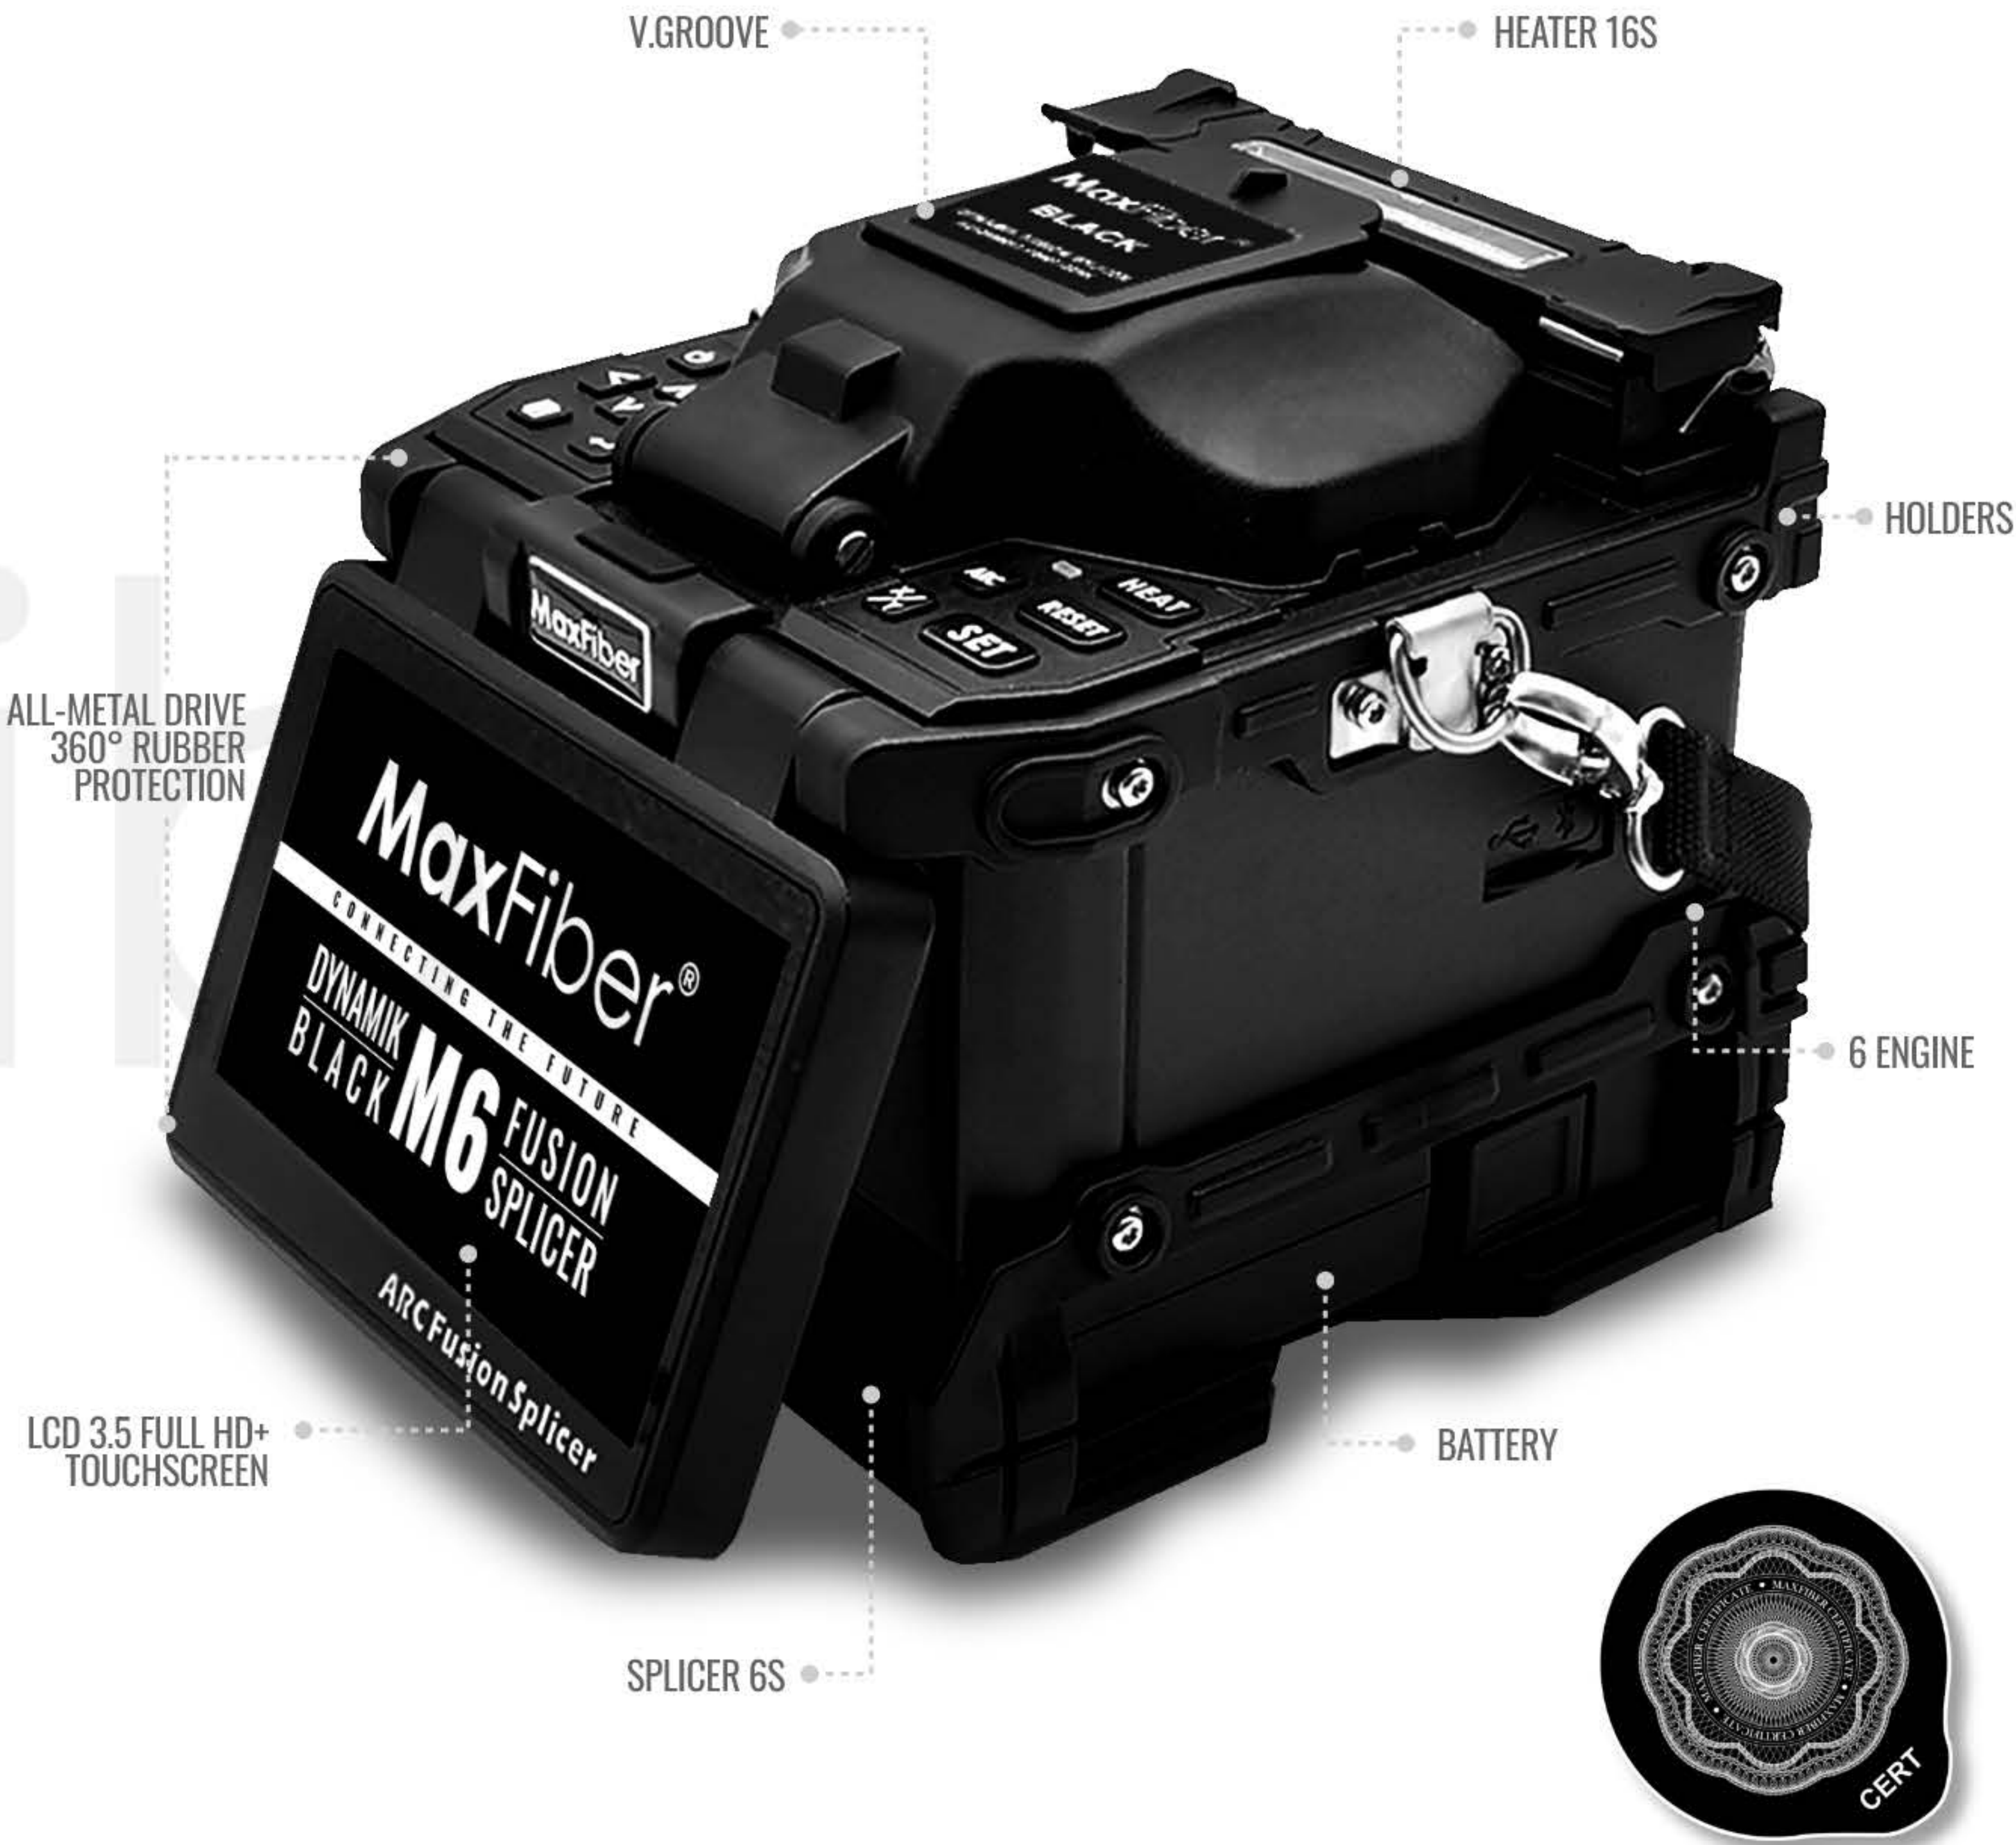

3 YEAR FUSION SPLICER BUYER PROTECTION

6 SECONDS SPLICING | 6 ENGINE | 16 SECONDS HEATING | AUTOMATIC FAST HEATING | IDENTIFY FIBER (SM / MM)

